


# F6 pushbutton switch

## Features

- Single-pole pushbutton switch

## Dimensions in mm

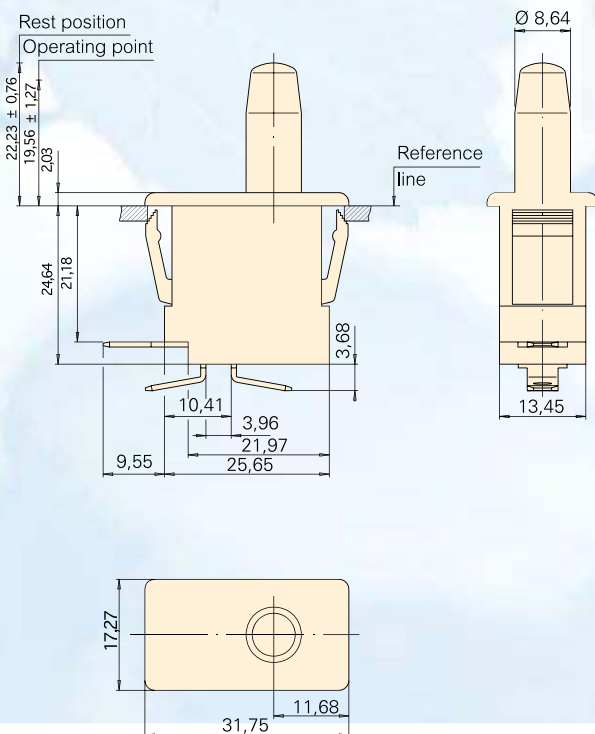

## Technical specifications

Contact configuration	S.P.D.T (S.P.S.T.-N.O. and S.P.S.T.-N.C on request)
Contact gap	< 3 mm
Contact rating	F68: 100 mA, 125 V AC F69: 16 A, 250 V AC
Total travel	up to 12,7 mm depending on model
Operating force	285–475 cN
Life cycle	> 10.000 operations (max. load)
Ambient temperature	-40 to +85 °C
Proof tracking index	PTI 175
Materials	
Housing	PBT (UL 94-VO)
Actuator	POM
Terminals	CuZn
Contacts	F68: AuAg (Crosspoint) F69: AgCdO
Degree of protection (switch interior)	IP40
Approvals	

For detailed information and the layout of the details described above, please do not hesitate to ask for our technical specifications and drawing.